


Signal Converters

NK ADC series signal converters use sensor outputs (4–20 mA, 0–5 and 0–10 VDC) and convert these to digital RS485 outputs. The CTC series accept either 5 A secondary current from current transformers or 0.333 VAC secondary voltage from our ProteCT series sensors and convert them to 4–20 mA loop powered output for use with PLCs, panel meters or data loggers.

Features:

- Made in USA
- DIN rail mounting makes installation a snap
- Industry standard outputs


- **ADC SERIES**
Analog to Digital Converter page 94
- **CTC SERIES**
Signal Converter page 96

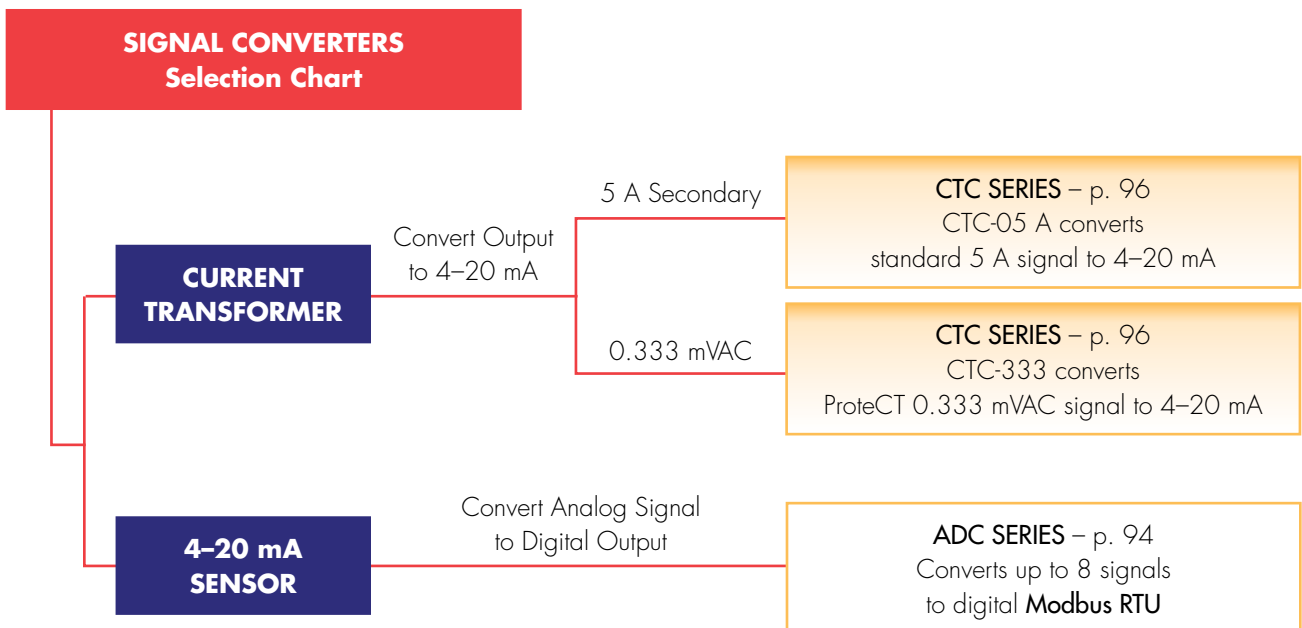

ADC SERIES

Analog to Digital Converters

The ADC Series Signal Converter connects up to eight 4–20 mA loop-powered analog sensors, or up to eight separately powered 4–20 mA output sensors, or up to four of each. This will produce a digital signal representing 0–100% of each sensor output. It is the perfect solution for photovoltaic power production system monitoring. The ADC converter allows for individually-ranged devices to interface with the industry-standard **Modbus RTU** serial protocol. The device can accept analog signals from current, voltage or temperature sensors, allowing the installer great versatility and higher accuracy. It was designed and built to meet the NK trusted standards of reliability and ease of use.

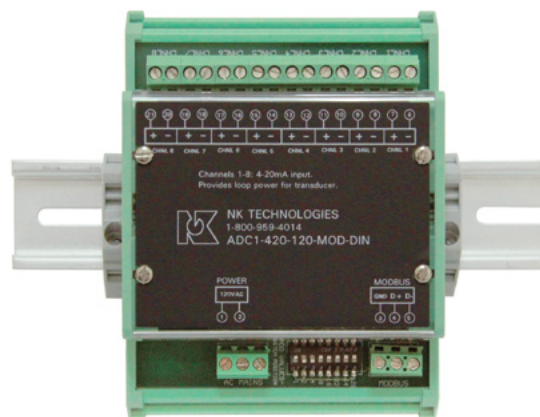

Signal Converter Applications

Photovoltaic Power Production

- Measure current output accurately using a sensor sized appropriately.
- Measure current from a panel and after the combiner with the same device.
- Measure voltage output, temperature, or any parameter sensor 4–20 mA output.


Machine Control

- Combine several analog signals into a single **Modbus** address to enable web viewing of data.

SCADA System

- Report and record current, voltage, power, pressure, frequency and flow by using existing sensors but adding network communication easily.

Analog Sensor to Digital Network Conversion

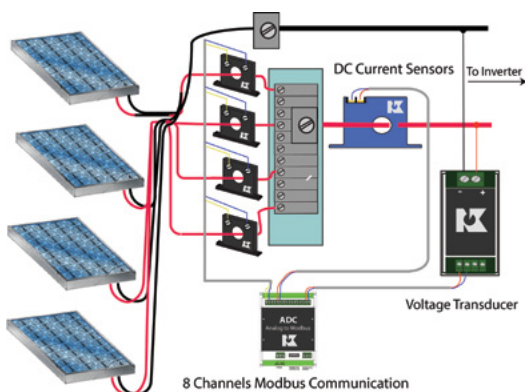

Free program expedites evaluation process. See page 1 for details.

Signal Converter Features

Eight Points of Data

- Convert up to eight 4–20 mA sensor outputs using a single network address.
- Sensor loop power is supplied by the converter: No DC power supply is required.
- Models for 8 loop powered (2-wire) and 8 externally powered (4-wire) or 4 of each type.

Fast and Easy Installation

- DIN rail mounted converter with finger-safe terminals clearly marked for field installation speed.

*For information on the DIN Rail accessories kit, see page 109.

Application Versatility

- Convert any standard sensor output to **Modbus RTU** digital network format.

Choice of Power Supplies

- ADC converter can be factory set for 120 VAC, 240 VAC or 24 VDC power supplies.

Communication Baud Rate Choices

- Field selectable 9600 or 19200 baud rate speeds.


Use any 4–20 mA output sensor as an input to the NK Technologies ADC analog-to-**Modbus** converter: Current, voltage, temperature, or any parameter that the application calls for. With the digital **Modbus** output scaled for zero (4 mA) to 100 percent (20 mA) the signal will represent whatever you may need to measure.

- For additional Application Examples, see page 110 and www.nktechnologies.com




Signal Converter Dimensions


Side View

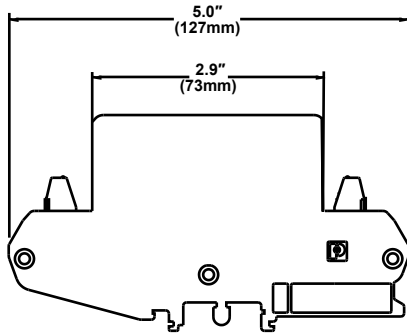

End View

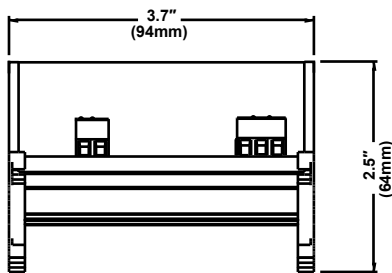

Signal Converter Connections

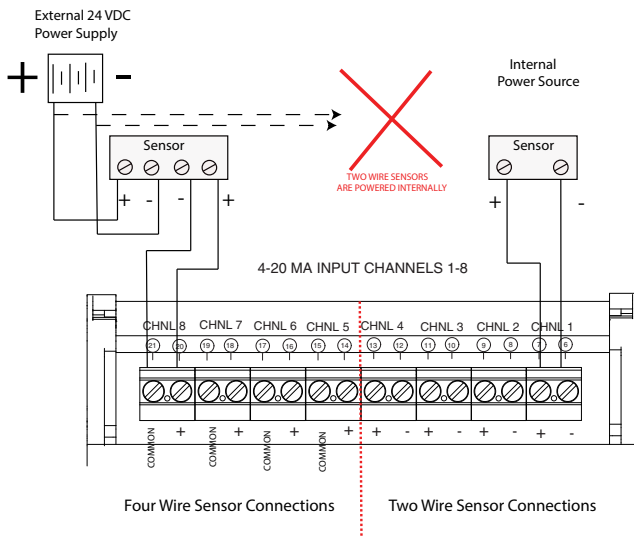

Wiring Notes for Installation:


1. Connect sensors to input channel terminals 6–21.
2. Set Modbus network address 1–247.
3. Connect 120 VAC power (240 VAC optional).

Signal Converter Specifications

Power Supply	24 VDC, 120 VAC 50–60 Hz, 240 VAC optional
Output	Modbus RTU Slave 8 Channels (RS485)
Output Protocol	1 start bit, 8 data bits (LSB first), 1 bit for even parity, 1 stop bit
Output Functions	Function 04, "Read Input Registers"
Input Range(s)	4–20 mA (Power from converter or external)
Accuracy	1.0% FS
Indication	Green Power On LED, Yellow Busy LED, Red Fault LED
Addressing	8 wide binary switch (1 to 247)
Output Range	0–120% (4 mA = 0, 20 mA = 100%)
Dimensions	3.7"H x 5.0"W x 2.0"D (94 mm H x 127 mm W x 51 mm D)
Weight	9.6 oz. (270 grams)
Case	DIN rail mounting, UL94 V0 Flammability Rated
Environmental	-4 to 122°F (-20 to 50°C) 0–95% RH, non-condensing
Listings	UL508 Industrial Control Equipment

Signal Converter Ordering Information

Sample Model Number: ADC1-420-120-MOD-DIN
Eight-channel 4–20 mA input converter, 120 VAC powered.



(1) Input channels

1	Eight 4–20 mA loop-powered input channels
2	Four loop-powered, four external powered (4-wire)
3	Eight external-powered inputs

(2) Sensor Input Type

420	4–20 mA inputs
005	0–5 VDC
010	0–10 VDC as inputs available

(3) Power Supply

120	120 VAC
240	240 VAC
24D	24 VDC

(4) Output Type

MOD	Modbus RTU
-----	------------

(5) Case Style

DIN	DIN rail mounting
-----	-------------------



CTC SERIES Signal Converters

CTC Series Signal Converters allow you to use an existing standard 5 A secondary or low-voltage ProteCT™ current transformer over a conductor to produce an industry standard 4–20 mA two-wire, loop-powered signal. The signal is proportional to the current in the primary circuit. The CTC series snaps onto a standard DIN rail. The output is connected to the load and a 24 VDC source and the current transformer is connected.



Signal Converter Applications

Adding Current Monitoring for System Upgrades

- Measure entire plant current consumption or individual machine usage.


Detect Problems Before Failure Occur

- Detect bearing failures on drive motors, open discharge lines on pumps.

Tool Monitoring and Jam Protection

- Measure drive motor HP to determine tool travel or contact with work.
- Monitor motor current use to provide an indication of motor jams.
- Use existing current transformers to monitor the current, and transmit 4–20 mA industry standard output.

Crusher/Grinder/Shredder Motor Interlocks

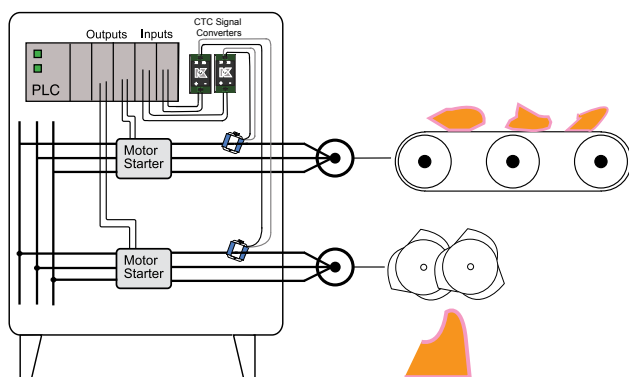

- For additional Application Examples, see page 110 and www.nktechnologies.com

Signal Converter Features

Uses any Standard 5 A Current Transformer or the Safer ProteCT™ Low Voltage Design

- Produces a 4–20 mA signal proportional to the AC current through the CT based on CT ratio.
- Two wires in, two wires out: Couldn't be easier.

Fast and Easy Installation

- DIN rail mounting* and 24 VDC loop-powered supply allows for quick and easy two-wire installation.

No Calibration Needed


- The primary current transformer ratio provides the scaling required without any other installer intervention.

*For information on the DIN Rail accessories kit, see page 109.

Test & Evaluation Units
Free program expedites evaluation process.
See page 1 for details.



Signal Converter Dimensions

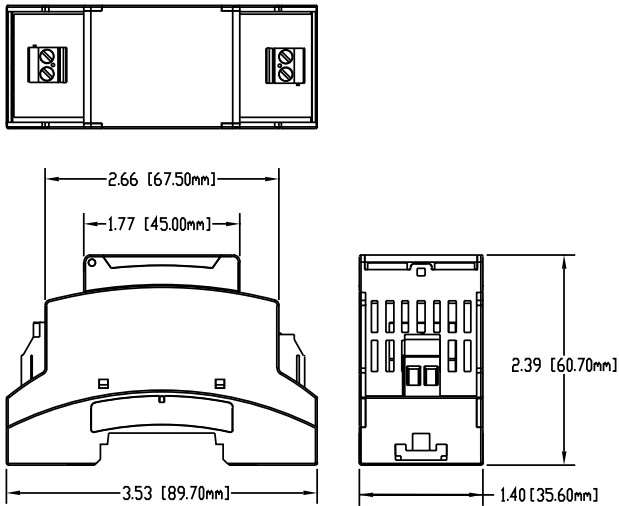


Signal Converter Specifications

Power Supply	24 VDC nominal loop-powered, 36 VDC max.
Output	4–20 mA proportional to max. current
Input Range(s)	Based on current sensor ratio
Accuracy	1.0% FS
Response Time	100 ms (to 90% step change)
Max. Inrush Current	300% FS (6 sec. duration)
Frequency Range	10–100 Hz
Case	Polycarbonate
Environmental	-4 to 122°F (-20 to 50°C) 0–95% RH, non-condensing
Listings	UL508 Industrial Control Equipment

Signal Converter Connections

Not Polarity Sensitive

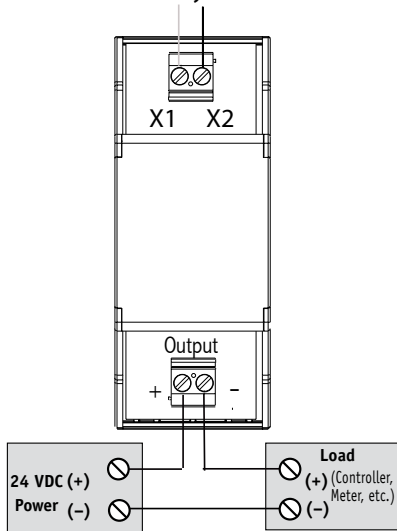


Notes:

With 5 A secondary current transformers, the secondary must be connected to a load (NK Technologies’ CTC converter or other load) when energized.

With ProteCT™ type (low voltage output) current sensors, there is no chance that dangerous voltages will result if the secondary is open when there is current through the sensing window.

Signal Converter Ordering Information

Sample Model Number: CTC333-420-24L-DIN
Transducer accepts 333 VAC inputs from ProteCT™ current sensors, and produces a corresponding 4–20 mA signal.



(1) Input CT Type

333	0.333 VAC low voltage ProteCT™
05 A	5 A secondary

(2) Output Signal

420	4–20 mA
-----	---------

(3) Power Supply

24L	24 VDC loop powered
-----	---------------------

(4) Case Style

DIN	DIN rail mounting enclosure
-----	-----------------------------

Signal Converters

