

# TEST GAUGES & EQUIPMENT

*ASME B 40.100 Grade 3A ( $\pm 0.25\%$  of span)*

*ASME B 40.100 Grade 2A ( $\pm 0.5\%$  of span)*

*ASME B 40.100 Grade 4A ( $\pm 0.1\%$  of span)*

Type A4A Dial Pressure Gauge .....	59
$\pm 0.25\%$ Type 1082 Analog Test Gauge.....	60
$\pm 0.5\%$ Type 1084 Pocket Test Gauge.....	61
Types 2089, 2086 & 2084	
Precision Digital Test Gauges	
( $\pm 0.05\%$ , $\pm 0.10\%$ , $\pm 0.25\%$ ) .....	62
ATE-2 Handheld Calibrator .....	63-64
ST-2A Digital Indicator .....	65-66
Type 1305D Deadweight Tester .....	67
Type 1327D/1327CM	
Pressure Gauge Comparator .....	68
PT Digital Pressure Indicator.....	69-70
Type AVC1000/3000	
Volume Controller .....	71



- **±0.1% F.S. accuracy – ASME B40.100, Grade 4A**
- **Ranges from 15-100,000 psi**
- **Solid front protective case**
- **High and low pressure limit stops**
- **Mirror band dial to eliminate parallax reading error**
- **Optional temperature compensation maintains 0.1% accuracy from -25 to +125°F**

The Ashcroft precision pressure gauge yields consistent, reliable accuracy through the use of state-of-

the-art precision machining and the world's most refined Bourdon tube technology. This eliminates the need for a power source and precludes the associated problems such as susceptibility to electronic line noise, power outage or potential fire hazard. In addition, this mechanical instrument is simple to operate, easy to troubleshoot, and can be readily flushed or purged to remove foreign matter or trapped gas. Accurate and reliable, the Ashcroft A4A sets a new standard for precision test gauges.



**STANDARD FEATURES & SPECIFICATIONS**

<b>Total Accuracy</b> ±0.1% F.S. Includes Certificate of NIST traceability	<b>Bourdon Tube</b> Bleeder tipped for easy flushing or purging
<b>Repeatability</b> ±0.02% F.S.	<b>Case</b> Cast aluminum solid front
<b>Hysteresis</b> ±0.1% F.S.	<b>Blowout rear cover</b>
<b>Dial</b> White, high resolution with mirror band	<b>Integral panel mounting flange</b>
<b>Pointer</b> Knife edge pointer to eliminate parallax errors	<b>Ranges</b> Available in Gauge, Compound, Vacuum and Absolute (requires manual barometric compensation)

**A4A**

<b>Pointer Travel</b> 350° (15-30,000 psi) 300° (40,000-50,000 psi) 270° (60,000-100,000 psi)	<b>Ranges</b> 0/15-0/100,000 psi
	<b>Dial Sizes</b> 6", 8 1/2", 12" & 16"

**INLETS AND BOURDON TUBES (STANDARD VS. OPTIONS)**

STANDARD		OPTIONAL	
Inlet Location			
Back Fittings		Bottom or Back Fittings	
<ul style="list-style-type: none"> <li>• 1/4 NPT female fitting (ranges up to and including 10,000 psi)</li> <li>• 9/16-18 UNF-2B high pressure for 1/4" O.D. high pressure tubing (ranges over 10,000 psi)</li> </ul>	<ul style="list-style-type: none"> <li>• 1/4 NPT female fitting (standard with back location)</li> <li>• 1/4 NPT male</li> <li>• 1/8 NPT male or female</li> <li>• 9/16-18 UNF-2B high pressure for 1/4" O.D. high pressure tubing</li> <li>• MS33656-4 male (7/16-20, 37° flare for 1/4" flare tubing)</li> <li>• AND10050-4/MS33649-4 female (7/16-20, 37° flare for 1/4" flare tubing)</li> </ul>		
Material and Range			
<ul style="list-style-type: none"> <li>• Beryllium copper (through 40 psi)</li> <li>• 403 S S (50 psi and above)</li> </ul>	<ul style="list-style-type: none"> <li>• Beryllium copper (50-10,000 psi)</li> <li>• 403 SS (be low 50 psi)</li> </ul>		

**OPTIONAL FEATURES (PROVIDED ONLY WHEN SPECIFIED)**

- Custom scales/units of measure
- The rmal compensation (maintains 0.1% accuracy from -25 to +125°F)
- SI tted link (protects movement during sudden pressure release)
- W all mounting brackets
- Pe ak load indicator
- Dua l scale dial

psi	
STANDARD BOURDON TUBE MATERIAL**	STANDARD RANGE psi
BERYLLIUM COPPER	0-15
	0-20
	0-25
	0-30
	0-40
	0-50
	0-60
	0-75
	0-100
	0-150
403 STAINLESS STEEL	0-200
	0-250
	0-300
	0-400
	0-500
	0-600
	0-750
	0-1000
	0-1500
	0-2000
0-2500	
0-3000	
0-4000	
0-5000	
0-6000	
0-7500	
0-10,000	
0-15,000	
0-20,000	
0-25,000	
0-30,000	
0-40,000	
0-50,000	
0-60,000*	
0-75,000*	
0-100,000*	

\* Available in 8 1/2", 12", 16".  
Dial face diameters only.  
\*\* For optional Bourdon Tube Materials consult factory.

INCHES MERCURY		
STANDARD BOURDON TUBE MATERIAL**	STANDARD RANGE INCHES MERCURY	
BERYLLIUM COPPER	0-30	
	0-40	
	0-50	
	0-60	
	0-75	
	0-100	
	0-125	
	0-150	
	0-200	
	0-250	
403 STAINLESS STEEL	0-300	
	0-400	
	0-500	
	0-600	
	0-750	
	0-1000	
	<b>VACUUM</b>	
	BERYLLIUM COPPER	-30 to 0
	<b>COMPOUND</b>	
	BERYLLIUM COPPER	<b>VACUUM-PRESSURE</b>
15 in.Hg - 15 in.Hg		
30 in.Hg - 30 in.Hg		
403 STAINLESS STEEL	30 in.Hg - 60 in.Hg	
	30 in.Hg - 100 in.Hg	
	30 in.Hg - 150 in.Hg	
BERYLLIUM COPPER	30 in.Hg - 15 psi	
	30 in.Hg - 30 psi	
403 STAINLESS STEEL	30 in.Hg - 60 psi	
	30 in.Hg - 100 psi	
	30 in.Hg - 150 psi	
<b>INCHES WATER</b>		
BERYLLIUM COPPER	0-450	
	0-500	
	0-600	
	0-750	
	0-800	
	0-1000	

MILLIMETERS MERCURY			
STANDARD BOURDON TUBE MATERIAL**	STANDARD RANGE MILLIMETERS MERCURY		
BERYLLIUM COPPER	0-760		
	0-1000		
	0-1250		
	0-1500		
	0-2000		
403 STAINLESS STEEL	0-2500		
	0-3000		
	0-4000		
	0-5000		
BERYLLIUM COPPER	bar	kg/cm <sup>2</sup>	kPa
	MPa		
	0-1	0-100	-
	0-1.6	0-160	-
	0-2	0-200	-
	0-2.5	0-250	-
	0-3	0-300	-
	0-4	0-400	-
	0-5	0-500	-
	0-6	0-600	-
0-7.5	0-750	-	
403 STAINLESS STEEL	0-10	0-1000	0-1
	0-12	0-1200	0-1.5
	0-16	0-1600	0-1.6
	0-20	0-2000	0-2
	0-25	0-2600	0-2.5
	0-30	0-3000	0-3
	0-40	0-4000	0-4
	0-50	0-5000	0-5
	0-60	0-6000	0-6
	0-75	0-7500	0-7.5
	0-100	0-10,000	0-10
	0-125	-	0-12.5
	0-160	-	0-16
	0-200	-	0-20
	0-250	-	0-25
0-400	-	0-40	
0-500	-	0-50	
0-600	-	0-60	
0-750	-	0-75	
0-1000	-	0-100	
0-1250	-	0-125	
0-1600	-	0-160	
0-2500	-	0-250	
0-4000	*-	0-400	
0-6000	*-	0-600	
0-7000	*-	0-700	
<b>VACUUM</b>			
BERYLLIUM COPPER	-1 to 0	-	-

\* Available in 8 1/2", 12", 16".  
Dial face diameters only.



**Pocket Test Gauge  
Type 1084, ASME B 40.100  
Grade 2A ( $\pm 0.5\%$  of span)**

- Available in a 3" dial size
- Stainless steel movement with Teflon-coated bearings and pinion gear
- Black, adjustable pointer with red-painted knife-edge tip
- Stainless steel construction
- Zero-adjustable white aluminum dial with polished mirror band
- 1/4 NPT lower connection only

With an accuracy of  $\pm 0.5\%$ , Grade 2A, plus rugged stainless steel construction, the Ashcroft® Type 1084 more than exceeds the requirements for on-the-spot inspections. To improve

accuracy, stability and socket thread life, the Bourdon tube and socket assembly is made of type 316 stainless steel with all-welded construction; this system is standard for all ranges.

To make reading easier and faster, each unit is provided with a new, highly readable dial. Reading error caused by parallax is eliminated by aligning the knife-edge tip pointer with its reflection in the mirror band on the dial. Also available is a stainless steel cover that fits securely over the window and protects the gauge from damage while being carried in a tool box or pocket. An attractive, cushioned Nylon fabric pouch with carrying strap is offered as standard equipment.



STANDARD RANGES		
Pressure psi	kg/cm <sup>2</sup> - bar	kPa
0/15	0/1	0/100
0/30	0/2	0/200
0/60	0/3	0/300
0/100	0/4	0/400
0/150	0/7	0/700
0/200	0/11	0/1100
0/300	0/14	0/1400
0/400	0/20	0/2000
0/600	0/28	0/2800
0/1000	0/40	0/4000
	0/70	0/7000
<b>Vacuum</b>		
30 in.Hg/0	-1/0	-100/0
<b>Compound</b>		
30 in.Hg/15 psi	-1/1	-100/100
30 in.Hg/30 psi	-1/3	-100/300
30 in.Hg/60 psi	-1/6	-100/600
30 in.Hg/100 psi	-1/10	-100/1000
30 in.Hg/150 psi		
30 in.Hg/300 psi		

BOURDON SYSTEM SELECTION					
Ordering Code	Bourdon Tube & Tip Material <sup>(1)</sup> (all joints TIG welded)	Socket Material	Tube Type	Range Selection Limits (psi)	NPT Conn.
S	316 stainless steel	316 stainless steel	C-Tube	vac/1000 psi	1/4

**TO ORDER THIS 1084 POCKET TEST GAUGE:**

Select: 30 1084 S 02L 0/1000#

1. Dial size—3" \_\_\_\_\_

2. Case type—1084 \_\_\_\_\_

3. Bourdon system selection ordering code \_\_\_\_\_

4. Connection size—1/4 (02) \_\_\_\_\_

5. Connection location—Lower (L) \_\_\_\_\_

6. Standard pressure range—1000 psi \_\_\_\_\_

- **Unmatched accuracy of  $\pm 0.05\%$  total error band**
  - Temperature corrected from 0/150°F
- **Breakthrough readability and portability**
  - 5 digit LCD display
  - Display height of .66"
- **Rugged portable design**
  - Weatherproof NEMA IV, IP65 case
  - CE, FM, CSA
  - Stainless steel case-to-socket weld for strength
  - Stainless steel cover protects keypad
- **Global/highly configurable**

- Nine options including 12 units of measure, 7 languages and password protected calibration and disable function

- **Safety features include**
  - Pressure range on keypad to reduce accidental overpressure
  - Proof pressure 2 x gauge range
  - Meets ASME B40.7
- **% of reading bar graph**

LOOK FOR THESE AGENCY MARKS ON OUR PRODUCTS



### PRODUCT SPECIFICATIONS

<b>Type:</b>	2089 (0.05% F.S. accuracy), 2086 (0.10% F.S. accuracy), 2084 (0.25% F.S. accuracy)
<b>Accuracy:</b>	0.05%, 0.10% or 0.25% all Full Scale, Terminal Point, Total Error Band (TEB) Including Hysteresis, Linearity, Repeatability and Temperature (0/150°F)
<b>Case Size:</b>	3"
<b>Case Material:</b>	300 Series Stainless Steel
<b>Case Finish:</b>	Electropolished/Tumbled
<b>Case Rating:</b>	Weatherproof, IP65, NEMA 4
<b>Wetted Parts:</b>	316 Stainless Steel
<b>Inlet Fittings:</b>	1/4 NPT Male, JIS, DIN, SAE, (others on application)
<b>Connection:</b>	Lower (6 o'clock), top, side
<b>Ranges:</b>	Vac. thru 7000 psi (see engineering units below for other units of measurement)
<b>Units:</b>	psi =# bar=BR kPa=KP mPa=MP inHg=IM inH <sub>2</sub> O=IW mmH <sub>2</sub> O=MMW cmH <sub>2</sub> O=CMW millibar=MB kg/cm <sup>2</sup> =KSC
<b>Operating Temp.:</b>	0/150°F (-18/65°C)
<b>Storage Temp.:</b>	-40/180°F (-40/82°C)
<b>Temp. Corrected:</b>	Yes
<b>DISPLAY</b>	
<b>Type:</b>	LCD
<b>Display Digits:</b>	5, 99999 display counts
<b>Character Height:</b>	.66"
<b>Backlite:</b>	Off by default
<b>Bar Graph:</b>	Yes
<b>Battery Life:</b>	<1000 hrs. (3 AAA alkaline batteries)
<b>Agency Approvals:</b>	CE EN 50082-1 (1997), FM, CSA Note: FM/CSA approval not valid on vac. and 15# & vac. ranges

### KEYPAD FUNCTIONS

<b>On/Off:</b>	Manually turns unit on and off (auto off options in configuration menu)
<b>Backlite:</b>	Manually turns backlite on and off (auto off options in configuration menu)
<b>Min/Max:</b>	Stores min. and max. values when displayed
<b>Zero/Clear:</b>	Zeros display or clears min. and max. values when displayed

<b>Enter:</b>	Selects items in configuration menu
<b>Configuration Mode:</b>	Allows scrolling through configuration menus to select available options
<b>Engineering Units:</b>	psi, Hg, H <sub>2</sub> O*, ftSW, Bar, mBar, kPa, mPa, mmHg, cmH <sub>2</sub> O, mmH <sub>2</sub> O, kg/cm <sup>2</sup> (*Allows choice of reference temperatures 4°C, 20°C or 60°F)
<b>Update Rate:</b>	Four Selections: 10x/sec, 5x/sec, 2x/sec, 1x/sec
<b>Auto Off:</b>	Five Options: Never, 2 min., 5 min., 15 min., 30 min.
<b>Dampening:</b>	Five Selections: None, average 2, 4, 6, 8 readings
<b>Language:</b>	Seven Languages: English, Spanish, French, Italian, German, Portuguese, Dutch
<b>Backlite:</b>	Five Selections: On/off, 10 sec., 30 sec., 1 min., 5 min.



<b>Calibrate:</b>	Zero and Span (password protected)
<b>Contrast:</b>	Seven available options
<b>Disable:</b>	Locks in current configuration settings.
<b>Calibration Chart:</b>	10 point individual calibration chart, standard for Type 3089, others optional (XC4)
<b>Accessories:</b>	300 Series SS Protective Cover, Protective Carrying Pouch
<b>Optional Features:</b>	Flange for Panel Mounting = FF, Metal Tag Wired to Case = NH, Paper Tag Wired to Case = NN, Protective Rubber Boot = B1, Certificate of Conformance = C1, Calibration Certificate (2084 & 2086 only. Standard w/2089) = C4, Weatherproof ABS Carrying Case = S7, Clean for Gaseous Oxygen Service = 6B, Clean for Liquid Oxygen Service = 6D

### DIGITAL PRECISION TEST GAUGE RANGES:

psi Gauge	psi Compound	psi Absolute	bar/kb/cm <sup>2</sup> Gauge	bar Compound	mmH <sub>2</sub> O Gauge	mPa Gauge	mBar/cmH <sub>2</sub> O Gauge	kPa Gauge	Temp. Options
vac.	15 & vac.	15	1	-1 to 0	3000	1	250	25	4°C
5	30 & vac.	25	1.6	-1 to 1	5000	1.6	300	40	20°C
10	60 & vac.	50	2.5	-1 to 2	10,000	2.5	400	60	60°F
15	100 & vac.		4	-1 to 30		6	500	160	
30			6	-1 to 30		10	600	250	
60			10			40	1000	400	
100			16				1600	600	
160			25				2000	1000	
200			40				2500		
300			60				4000		
500			160				5000		
600			250				6000		
800			400						
1000			500				10,000		
2000									
2500									
3000									
5000									
700									

### TO ORDER THIS DIGITAL TEST GAUGE:

<b>Select:</b>	<b>Example:</b>	<b>30</b>	<b>2089</b>	<b>SD</b>	<b>02L</b>	<b>100#</b>	<b>B1, 6B</b>
1. Dial Size: 3" = <b>30</b>							
2. Model: <b>2084, 2086, 2089</b>							
3. Case: 316 SS = <b>SD</b>							
4. Connections: 1/4 NPT Male Lower = <b>02L</b>							
5. Range Value: (see range chart)							
Unit of Measurement: (see "Units" list)							
6. Options: (see "Optional Features" list)							

Consult factory for guidance in product selection  
Phone (203) 378-8281 or visit our  
web site at [www.ashcroft.com](http://www.ashcroft.com)

## Handheld LCD Digital Calibrator Type ATE-2 Pressure, Temperature, Voltage and Current Measurement

- **Standard features on ATE-2 units now include Datalogging, USB interface, onboard 24VDC Loop Power Supply and IP65 Enclosure**
- **Interchangeable pressure and temperature modules**
- **Pressure measurement accuracies of  $\pm 0.025\%$ ,  $0.05\%$  and  $0.10\%$ , or  $.06/.07\%$**
- **Pressure ranges from 0.25 in.H<sub>2</sub>O to 10000 psi**
- **Push-button zero adjust**
- **Supports most standard RTD probes and thermocouples**
- **Min/max, tare, programmable damping, percent function, trip detect, all standard**
- **Optional Intrinsically Safe version available (no 24Vdc loop supply)**

### BASE UNIT PHYSICAL SPECIFICATIONS

#### Dimensions

8.7 in. (L) x 5.1 in. (W) x 3.8 in. (H)

#### Weight

Max. 2.4 lbs. w/2 pressure modules installed

#### Case Material

High impact PC-ABS

#### Sensor Module Capacity

2 bays for Ashcroft AM2 sensor modules

#### Display

1.5" x 2.5" graphic LCD display with backlight. Flip-screen capability with bar-graph indication of % span. Can display 2 simultaneous modules in addition to one electronic reading (mA/V)

#### Electrical Connection

4mm banana jacks (one set of test leads provided with each ATE-2)

### BASE UNIT OPERATING SPECIFICATIONS

#### Operating Temperature Range

Standard: -4 to 120°F

#### Storage Temperature

-4° to 158°F

#### Update Rate

100 ms with one pressure module installed. 200 ms with two pressure modules installed

#### Resolution

$\pm 0.0015\%$  of span, 66,000 counts (max)

#### Warm-Up

5 minutes for rated accuracy

#### Damping

Programmable filtering, levels one through 16

#### Electrical Measurements

##### 0-20 mA or 0-30 Vdc

Input (volts)	Accuracy
0/10 Vdc	$\pm 0.025\%$ FS
0/30 Vdc	$\pm 0.10\%$ FS
0/20mA	$\pm 0.03\%$ FS

#### Enclosure

IP65/NEMA 4X (includes modules)

The Ashcroft® ATE-2 is a next generation handheld calibrator with extensive data logging and communications capabilities. Onboard data logging can be transferred to a standard SD card or serial interface via the USB connection, thus offering the operator flexibility and convenience. Optional intrinsically safe version is suitable for use on gas, oil and in chemical processing environments. Interchangeable pressure and temperature modules mean that one base unit can be used in many applications. Existing pressure and temperature modules can be upgraded by the factory to work with the new base unit, saving the operator money.

#### Temperature Effect; Electrical Measurement

$\pm 0.001\%$  of Span per °F over compensated range

#### Serial Interface

USB (Micro-B connector type)

#### Field Calibration

Both pressure modules and base unit electronics can be calibrated in the field via prompted keypad commands

#### Datalogging

- Internal storage up to 15,700 records that is transferrable to a removable SD card
- Manual and automatic datalogging capability
- Data interval programmable from 0.1 to 3600 sec

#### Agency Approvals (with modules)

CE Mark (EMI/RFI), FCC (CFR47) and UL 61010-1 are standard

Optional hazardous location version (for use with batteries only) includes:

- FM Intrinsic Safety CL I, Div I, Gr A,B,C,D
- CSA Intrinsic Safety CL I, Div I, Gr A,B,C,D
- ATEX Ex ia ii c T4 Ga -20°C <Ta < +50°C

#### Power Requirements

(4) AA Batteries (provides up to 40 hours battery life with 2 modules installed) or USB Universal AC Adapter (100-240 VAC, 50/60 Hz)

#### Certification

N.I.S.T. Traceable certification document provided for base display unit and sensor modules

### PRESSURE SENSOR MODULE SPECIFICATIONS

#### AM2-1 Low Pressure Modules

##### Pressure Types

Gauge, differential & compound

##### Available Ranges

0-25 in. H<sub>2</sub>O - 200 in. H<sub>2</sub>O (See Chart)

##### Available Accuracies

$\pm 0.06\%$  (0/1-0/200 in. H<sub>2</sub>O),  $\pm 0.07\%$  (0/0.25-0/.5 in. H<sub>2</sub>O) or 0.1% of Span

##### Compensated Temperature Range

20°F to 120°F



#### Temperature Effect

$\pm 0.004\%$  of Span per °F over compensated range (from reference temperature range of 70°  $\pm 3^\circ$ )

#### Repeatability

$\pm 0.01\%$  of span (range 0/1 in. H<sub>2</sub>O or higher)  $\pm 0.02\%$  of span (ranges below 0/1 in. H<sub>2</sub>O)

#### Sensitivity

$\pm 0.002\%$  of span (typical)

#### Media Compatibility

Clean, dry, non-conductive, non-corrosive gas

#### Under/Overpressure Capability

-15 to 50 psi

#### Maximum Static (line) Pressure

100 psi

#### Process Connection

Standard:  $\frac{1}{8}$  NPT female

#### AM2-2 High Pressure Modules

##### Pressure Types

Gauge, absolute, compound & vacuum

##### Available Ranges

5 psi-10,000 psi (See Chart)

##### Available Accuracies

$\pm 0.025$ ,  $0.05$  or  $0.1\%$  of Span (0-10,000 psi range only available as psig and 0.1% accuracy)

##### Compensated Temperature Range

20°F to 120°F

#### Temperature Effect

Standard:  $\pm 0.004\%$  of Span per °F over the compensated range (from reference temperature range of 70°  $\pm 3^\circ$ )

Optional: No additional error due to temperature over the compensated range

#### Repeatability

$\pm 0.01\%$  of span

#### Sensitivity

$\pm 0.002\%$  of span (typical)

Consult factory for guidance in product selection

Phone (203) 378-8281 or visit our

web site at [www.ashcroft.com](http://www.ashcroft.com)

## Handheld LCD Digital Calibrator Type ATE-2, Pressure, Temperature, Voltage and Current Measurement

### AM2-2 High Pressure Modules (cont.)

#### Media Compatibility

0/5-0/10,000 psi ranges: Any medium compatible with 316 stainless steel isolation.  
Optional: Cleaned for Oxygen Service

#### Overpressure Capability

200% for ranges up to 1000 psi  
150% for ranges over 1000 psi

#### Process Connection

Standard: 1/8 NPT female  
Optional: 1/8 NPT female with flush port  
Welded VCR fitting with standard finish (ranges up to and including 5000 psi)

### TEMPERATURE INTERFACE MODULES

#### AM2-RT Series (RTD)

AM2-RT1 and AM2-RT2 interface modules allow the ATE-2 to measure temperature with an RTD

**AM2-RT1:** Accommodates Pt100, Ni120, Cu120 and other common 2, 3 or 4 wire probes with resistance outputs of 400 ohms or less.

**AM2-RT2:** Accommodates Pt1000 and other common 2, 3 or 4 wire probes with resistance outputs of 4000 ohms or less.

#### Selectable Units of Measure

°C, °F, °K, °R and ohms

#### Input Receptacle

Accepts TA4F type RTD connector



Model ATE-2 with AM2 Modules

#### RTD Probes Available

Pt-100 probes, 6" or 12" length, with or without handle. DIN Class A accuracy. Includes mating TA4F connector. Consult factory for details and availability.

#### AM2-TC1 (Thermocouple)

The AM2-TC1 interface module allows the ATE-2 to measure temperature with a thermocouple

#### Compatibility

Programmed to provide direct temperature readout from types J, K, T, E, R, S, B & N thermocouples or direct millivolt readout from any thermocouple.

#### Reference Junction

Automatic internal or manual external

#### Resolution

Automatic or manually selectable, up to .01°

#### Units of Measure

Selectable; °C, °F, °K, °R and millivolts

#### Receptacle

Accepts "miniature thermocouple connector", Omega® type SMP

### ACCESSORIES

Contoured protective case with shoulder strap  
Hard carrying case

### STANDARD RANGES

AM2-2 psi (gauge and absolute pressure)	AM2-1 in. H <sub>2</sub> O (gauge/ differential pressure)	Other Engineering Units**
5	0.25*	psi
10	0.5*	in. H <sub>2</sub> O
15	1.0*	in. Hg
20	2.0*	ftSW
25	3.0*	bar
30	5.0*	mbar
50	10*	kPa
60	15*	MPa
100	25*	mmHg
150	50*	cmH <sub>2</sub> O
200	100*	mmH <sub>2</sub> O
250	150*	kg/cm <sup>2</sup>
300	200*	User Selectable
500		
600		
1000		
1500		
2000		
2500		
3000		
5000		
6000		
7500		
10,000†		
<b>vacuum</b>		
5		
10		
15		
<b>compound</b>		
±5	±0.125*	
±10	±0.25*	
±15	±0.5*	
-15/+30	±1.0*	
-15/+60	±1.5*	
	±2.5*	
	±5.0*	
	±7.5*	
	±12.5*	
	±25*	
	±50*	
	±75*	
	±100*	

\*\*Note: Engineering units identified above are accessible through the unit select feature. However, readout will default to the primary unit of measure on start-up. Sensor modules scaled in primary units other than in. H<sub>2</sub>O (AM2-1) or psi (AM2-2) are also available. Consult factory.

tpsig only for this range.

\* Non-isolated, for clean dry gas only

### TO ORDER

#### Base Display Unit

- 1) Specify Model: ATE-2
- 2) Specify Version: Standard (ST) or Intrinsically Safe (IS) for hazardous locations (includes FM (IS), CSA (IS) and ATEX)

#### Sensor Modules

- 3) Type (AM2-1 or AM2-2)
- 4) Pressure Range and Unit of Measure (see range chart)
- 5) Pressure Type (see specifications)
- 6) Accuracy (see specifications)

#### 7) Specify Options

- a) "zero temperature error over compensated range" (AM2-2 only)
- b) Optional fitting (see specifications)
- c) Clean for Oxygen Service (AM2-2 only)

#### Temperature Interface Module

- 8) Type (AM2-RT1, AM2-RT2 or AM2-TC1)
- 9) RTD Probe Type (when required.)

#### Accessories

- 10) Specify required accessories

Consult factory for guidance in product selection  
Phone (203) 378-8281 or visit our  
web site at [www.ashcroft.com](http://www.ashcroft.com)



## LCD Digital Indicator, Type ST-2A Pressure, Temperature, Voltage and Current Measurement

### Standard Features

- **Dual display – simultaneous measurement and display of pressure, temperature, voltage or current in any combination**
- **Accuracy ratings of  $\pm 0.1\%$ ,  $\pm 0.05\%$  and  $\pm 0.025$  of span (pressure)**
- **Pressure ranges from 0.25 inches of water to 10,000 psi**
- **Interchangeable pressure and temperature modules**
- **Multiple engineering units – 12**
- **High static DP measurement capability**
- **Temperature measurement with most common RTDs and thermocouples**
- **Programmable damping**
- **Tare capability**
- **Display hold**

- **RS232 two way communications**
- **Standard NIST traceable certificate of calibration**

### Optional Features

- **24 Vdc power supply**
- **Data logging – Automatic, manual and delayed actuation**
- **Relays – hi/lo programmable configurations – N/O and N/C**
- **Battery power – 5 AA NiCads with built-in charger**

The ST-2A is the perfect bench companion product to the Ashcroft® ATE-100 field handheld calibrator. This bench top (or panel mounting) package shares the same pressure and temperature modules and interfaces with the same software package



as the Ashcroft ATE-100. An intuitive, menu-driven user interface puts all of the ST-2A's power at the simple press of a key. It uses the AQS (Ashcroft Quick-Select™) modular sensor system to provide the ultimate in measurement flexibility.

## PRODUCT SPECIFICATIONS

### PHYSICAL SPECIFICATIONS

#### Dimensions

10.9 in. (L) x 6.74 in. (W) x 4.0 in. (H)

#### Panel Cutout

6.56 in. x 3.53 in.

#### Weight

Max. 4.08 lbs. w/2 pressure modules installed

#### Case Material

High impact ABS

#### Sensor Module Capacity

2 bays for Ashcroft AQS "Quick Select®" sensor modules

#### Display

2 line LCD, 0.37 in. height per line. Can display simultaneous readings from 2 modules.

#### Electrical Connection

Standard banana jacks

### BASE UNIT OPERATING SPECIFICATIONS

#### Operating Temperature Range

32° to 120°F

#### Storage Temperature

-4° to 158°F

#### Update Rate

130 ms (nominal) with one sensor installed

#### Resolution

$\pm 0.002\%$  of span, 60,000 counts (max)

#### Warm-Up

5 minutes for rated accuracy

#### Electrical Measurements

0-20 mA or 0-30 Vdc

#### Options

**Datalogging with Hi-Lo Relay Feature** – Datalogging manually or automatically stores up to 643 measured values for upload to PC. Includes upload utility software. Hi-Lo relay feature allows

programming of setpoints for activation of alarms or control valves.

#### Backlit Display

Built-in NiCad Rechargeable Battery Pack

Built-in 24Vdc Loop Power Supply

Handle

Panel Mounting Brackets

#### Power Requirements

Standard: ac adapter provided for 110Vac/60 Hz

Available: ac adapter provided for 220Vac/50 Hz

ac adapter provided for 100Vac/60 Hz

Optional: Built-in rechargeable NiCad Battery Pack\*

\* (Life: 20 hours nominal without backlit LCD, 2 hours nominal with backlit LCD. Activating RS232 results in approximately 30% reduction in battery life.)

#### Certification

N.I.S.T. Traceable certification document provided for base display unit and sensor modules

### PRESSURE SENSOR MODULE SPECIFICATIONS

#### AQS-1

#### Pressure Types

Gauge, differential & compound

#### Available Ranges

(See Chart)

#### Available Accuracies

$\pm 0.06$  (0/1-0/200 in. H<sub>2</sub>O),  $\pm 0.07$  (0/0.25-0/0.5 in. H<sub>2</sub>O) or 0.1% of Span

#### Compensated Temperature Range

20°F to 120°F

#### Temperature Effect

$\pm 0.004\%$  of Span per °F over compensated range (from reference temperature range of 70°  $\pm 3^\circ$ )

#### Repeatability

$\pm 0.01\%$  of span (range 0/1 in. H<sub>2</sub>O or higher)

$\pm 0.02\%$  of span (ranges below 0/1 in. H<sub>2</sub>O)

#### Sensitivity

$\pm 0.002\%$  of span (typical)

#### Media Compatibility

Clean, dry, non-conductive, non-corrosive gas

#### Under/Overpressure Capability

-15 to 50 psi

#### Maximum Static (line) Pressure

100 psi

#### Process Connection

Standard: 1/8 NPT female

#### AQS-2

#### Pressure Types

Gauge, absolute, compound and vacuum

#### Available Ranges

(See Chart)

#### Available Accuracies

$\pm 0.025$ , 0.05 or 0.1 % of Span ( $\pm 0.025$  & 0.05% not available on 0/10,000 psi range)

#### Compensated Temperature Range

20°F to 120°F

#### Temperature Effect

Standard:  $\pm 0.004\%$  of Span per °F over the compensated range (from reference temperature range of 70°  $\pm 3^\circ$ )

Optional: No additional error due to temperature over the compensated range

#### Repeatability

$\pm 0.01\%$  of span

#### Sensitivity

$\pm 0.002\%$  of span (typical)

#### Media Compatibility

0/5 -0/10,000 psi ranges: Any medium compatible with 316 SS isolation.

Optional: Cleaned for Oxygen Service

Consult factory for guidance in product selection

Phone (203) 378-8281 or visit our

web site at [www.ashcroft.com](http://www.ashcroft.com)

## LCD Digital Indicator, Type ST-2A Pressure, Temperature, Voltage and Current Measurement

### Overpressure Capability

200% for ranges up to 1000 psi  
150% for ranges over 1000 psi

### Process Connection

Standard: 1/8 NPT female  
Optional: 1/8 NPT female with flush port  
Welded VCR fitting with standard finish (ranges up to and including 5000 psi).

### TEMPERATURE INTERFACE MODULES

AQS-RT1 and AQS-RT2 interface modules allow the ST-2A to measure temperature with an RTD:

**AQS-RT1:** Accommodates Pt100, Ni120, Cu120 and other common 2, 3 or 4 wire probes with resistance outputs of 400 ohms or less.

**AQS-RT2:** Accommodates Pt1000 and other common 2, 3 or 4 wire probes with resistance outputs of 4000 ohms or less.

### Selectable Units of Measure

°C, °F, °K, °R and ohms

### Input Receptacle

Accepts TA4F type RTD connector



### RTD Probes Available

Pt-100 probes, 6" or 12" length, with or without handle. DIN Class A accuracy. Includes mating TA4F connector. Consult factory for details and availability.

The AQS-TC1 interface module allows the ST-2A to measure temperature with a thermocouple:

### AQS-TC1

#### Compatibility

Programmed to provide direct temperature readout from types J, K, T, E, R, S, B & N thermocouples or direct millivolt readout from any thermocouple.

#### Reference Junction

Automatic internal or manual external

#### Resolution

Automatic or manually selectable, up to .01°

#### Units of Measure

Selectable; °C, °F, °K, °R and millivolts

#### Receptacle

Accepts "miniature thermocouple connector", Omega® type SMP

### ACCESSORIES

110Vac/60 Hz ac Adapter  
220Vac/50 Hz ac Adapter

### STANDARD RANGES

AQS-2 psi (gauge and absolute pressure)	AQS-1 in.H <sub>2</sub> O (gauge/ differential pressure)	Other Engineering Units**
5		
10	0.25*	psi
15	0.5*	in.H <sub>2</sub> O
30	1.0*	in.Hg
50	2.0*	ftSW
60	3.0*	bar
100	5.0*	mbar
150	10*	kPa
200	15*	MPa
250	25*	mmHg
300	50*	cmH <sub>2</sub> O
500	100*	mmH <sub>2</sub> O
600	150*	kg/cm <sup>2</sup>
1000	200*	User Selectable
1500		
2000		
2500		
3000		
5000		
6000		
7500		
10,000		
<b>vacuum</b>		
5		
10		
15		
<b>compound</b>		
±5		
±10	±0.125*	
±15	±0.25*	
-15/+30	±0.5*	
-15/+60	±1.0*	
	±1.5*	
	±2.5*	
	±5.0*	
	±7.5*	
	±12.5*	
	±25*	
	±50*	
	±75*	
	±100*	

\*\*Note: Engineering units identified above are accessible through the unit select feature. However, readout will default to the primary unit of measure on start-up. Sensor modules scaled in primary units other than in. H<sub>2</sub>O (AQS-1) or psi (AQS-2) are also available. Consult factory.

\* Non-isolated, for clean dry gas only

### TO ORDER

#### Base Unit

- Specify Model: ST-2A
- Specify Power Requirements: 110, 220 or 100Vac
- Specify Options: (Datalogging, Backlit Display, etc.)

#### Sensor Modules

- Type (AQS-1 or AQS-2)
- Pressure Range and Unit of Measure (see range chart)
- Pressure Type (see specifications)
- Accuracy (see specifications)
- Specify Options
  - "zero temperature error over compensated range" (AQS-2 only)
  - Optional fitting (see specifications)
  - Clean for Oxygen Service (AQS-2 only)

#### Temperature Interface Module

- Type (AQS-RT1, AQS-RT2 or AQS-TC1)
- RTD Probe Type (when required. Consult factory for probe P/N)

#### Accessories

- Specify required accessories

## Deadweight Tester Type 1305D, Accuracy ( $\pm 0.1\%$ of reading)

- **Accuracy: 0.1% of reading**
- **Operating Pressure: 15 psi to 10,000 psi**
- **Operating Media:**  
1305D: SAE 20 weight automotive or machine oil  
1305DH: Phosphate-based or glycol fluids
- **O-ring Material:**  
1305D: Buna-N (D series)
- **1305DH: Ethylene Propylene (DH Series)**
- **Piston and Cylinder Material:**  
Stainless steel
- **Weight Material: Non-magnetic die cast zinc**
- **Reservoir Volume: Approximately 1.5 pints (0.7 liter)**
- **Special "CD-5" Certification package available (see Price Sheet TE/PS-1)**

Ashcroft® Type 1305D deadweight testers provide an easy means of precisely generating pressure to an accuracy of 0.1% of reading. Ashcroft 1305D units are available for operating ranges up to 10,000 psi. They are ideal for use in calibrating, setting, testing and repairing pressure measurement and control devices. Each 1305D unit is traceable to the National Institute of Standards and Technology, assuring instrument accuracy.

These pressure systems are designed to be field portable. A single carrying case holds the pressure generation pump as well as all the necessary tools and accessories. A second box contains the weights used for pressure generation (10,000 psi units require two boxes of weights). Ashcroft deadweight testers qualify as primary standards for pressure calibration.

The pump is a two-stage hydraulic pressure generator. A built-in shuttle valve allows for rapid pressure increase at low pressures. The rate of increase per pump cycle can be reduced at higher pressures to minimize resistance. This is accomplished by simply repositioning the two-position shuttle valve. With the shuttle valve in the high-pressure position, increasing pressure even when near the 10,000 psi upper limit can be accomplished quickly and easily. Final, precise adjustment is accomplished through the use of an integral vernier-adjustment knob.

The 1305D is provided with two-piston cylinder assemblies. A low-pressure



piston for pressure ranges from 15 to 2000 psi and a high-pressure unit for pressures from 75 to 10,000 psi. The high-pressure piston has an area of  $\frac{1}{60}$ th of a square inch while the low pressure piston has an area of  $\frac{1}{16}$ th of a square inch. Weights are provided for pressure increments of 5, 10, 20, 25, 40, 50, 100, 200 and 500 psi (depending on piston in use). Ashcroft 1305D testers can be used anywhere within their operational range without any change in accuracy. The same weights are used with both piston and cylinder assemblies.

Ashcroft 1305 units are available for psi ranges. Each unit comes complete with a hand jack set (for removal of pointers on gauges being calibrated), spare O-rings and all tools, accessories and fittings required for normal use.

### 1305D STANDARD PRESSURE RANGES

psi Type	Piston assemblys Pressure Range		Piston Value		Number of Weights by Value					Net Weight	
	Low	High	Low	High	L-5 H-25	L-10 H-50	L-20 H-100	L-40 H-200	L-100 H-500	lb	kg
1305D-10	15/200	75/1000	5	25	1	3	2	3	-	60	27
1305D-20	15/400	75/2000	5	25	1	3	2	3	2	70	32
1305D-30	15/600	75/3000	5	25	1	3	2	3	4	85	39
1305D-50	15/1000	75/5000	5	25	1	3	2	3	8	105	48
1305D-100	15/2000	75/10,000	5	25	1	3	2	3	18	175	80

Consult factory for guidance in product selection  
Phone (203) 378-8281 or visit our  
web site at [www.ashcroft.com](http://www.ashcroft.com)

**Pressure Gauge Comparator**  
**Type 1327D, Accuracy ( $\pm 0.25\%$ )**  
**Type 1327CM, Accuracy ( $\pm 0.1\%$ )**

- **Operating Pressure: 0-10,000 psi (maximum) (0-60,000 kPa)**
- **Operating Media:**  
**Standard:**  
**SAE 20 weight automotive or machine oil**  
**Optional:**  
**Phosphate-based or glycol fluids**  
**Distilled water for oxygen service**
- **O-ring Material:**  
**Standard: Buna N (D Series)**  
**Optional: Ethylene Propylene (DH Series)**
- **Reservoir Volume: Approximately 1.5 pints (0.7 liter)**

**SPECIFICATIONS TYPE 1327DG**

- **Accuracy:  $\pm 0.25\%$  F.S.**
- **Gauge Type: Ashcroft 4½ inch Type 1082 gauges with temperature compensation**
- **Special "CD-4" Certification package available (see Price Sheet TE/PS-1)**

**SPECIFICATIONS TYPE 1327CM**


- **Accuracy:  $\pm 0.1\%$  F.S.**
- **Gauge Type: Ashcroft 6-inch Type A4A with temperature compensation**
- **Temperature Compensation:  $-25^{\circ}\text{F}$  to  $+125^{\circ}\text{F}$  (will maintain  $\pm 0.1\%$  F.S. accuracy)**

Ashcroft® Types 1327D and 1327CM are designed to be field-portable pressure generation and test systems. A single carrying case holds the pump used to generate pressure as well as the gauges selected as the test standard.

Both units include an Ashcroft two-stage hydraulic pressure pump. A built-in shuttle valve allows for rapid pressure increase at low pressures. The rate of increase per pump cycle can be reduced at higher pressures in order to minimize resistance. This is accomplished by simply repositioning the two-position shuttle valve. With the shuttle valve in the high-pressure position, increasing pressure even when near 10,000 psi can be accomplished quickly and easily. Final adjustment is accomplished through the use of an integral vernier-adjustment knob.

**Type 1327CM**

The Ashcroft Type 1327CM is a precision gauge comparator which is provided with 6-inch Ashcroft  $\pm 0.1\%$  F.S. accuracy Type A4A gauges. The gauges provided include temperature compensation which maintains the  $\pm 0.1\%$  F.S. accuracy over an operating range of  $-25^{\circ}\text{F}$  to  $+125^{\circ}\text{F}$ . Available ranges include 30, 100, 500, 1000, 5000 and 10,000 psi.

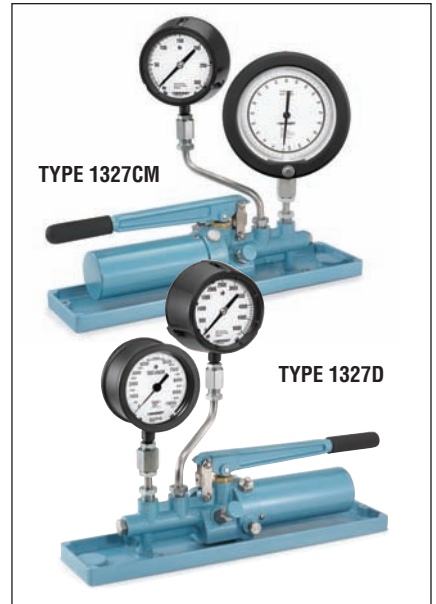

**Type 1327D**

The Ashcroft 1327D is available between one and four Ashcroft gauges covering the operating range of 0 through 10,000 psi. Metric range models are also available.

The 1327DG is provided with 4½" Ashcroft Type 1082 test gauges. These gauges provide an accuracy of  $\pm 0.25\%$  F.S. The Ashcroft test gauges include temperature compensation and have a maximum thermal error of 0.005% F.S. per degree F.

Ashcroft Types 1327CM and 1327D are ideally suited for use as in-field pressure standards. Both come with temperature-compensated gauges, further enhancing their field worthiness. A single carrying case holds everything needed to take full advantage of the capabilities of the test set. psi and metric ranges are available for either system. Both systems are traceable to NIST with the 1327CM provided with calibration certificates for each gauge selected.

**1327D STANDARD PRESSURE RANGES**

Unit of Measure	Type	Gauge Range(s) Included				Net Weight	
						lb	kg
psig	1327DG-2	0/150	—	—	—	36	16
	1327DG-6	0/150	0/600	—	—	38	17
	1327DG-50	0/150	0/600	0/5000	—	40	18
	1327DG-100	0/150	0/600	0/5000	0/10000	42	19
kg/cm <sup>2</sup>	1327DMG-10	0/10	—	—	—	36	16
	1327DMG-40	0/10	0/40	—	—	38	17
	1327DMG-250	0/10	0/40	0/250	—	40	18
	1327DMG-600	0/10	0/40	0/250	0/600	42	19
bar	1327DBG-10	0/10	—	—	—	36	16
	1327DBG-40	0/10	0/40	—	—	38	17
	1327DBG-250	0/10	0/40	0/250	—	40	18
	1327DBG-600	0/10	0/40	0/250	0/600	42	19
kPa	1327DAG-1000	0/1000	—	—	—	36	16
	1327DAG-4000	0/1000	0/4000	—	—	38	17
	1327DAG-25000	0/1000	0/4000	0/25000	—	40	18
	1327DAG-60000	0/1000	0/4000	0/25000	0/60000	42	19

For hydraulic fluid service (phosphate base and glycols) specify 1327DH, DMGH, DBGH or DAGH.  
 For oxygen service (distilled water) specify 1327DGO, DMGO, DBGGO or DAGO.

## Pressure Tester Model PT, Dual Display LCD Digital Pressure Indicator

### STANDARD FEATURES

- **Push-button zero adjust**
- **Max/min memory**
- **Selectable engineering units**
- **Variable damping**
- **Tare**
- **Port select**
- **Push-to-print**
- **RS232 I/O**
- **High static DP capability**

### OPTIONAL FEATURES

- **Backlit display**
- **Rechargeable battery pack**

The Ashcroft® PT indicator is an extremely versatile pressure measurement and test instrument. It can simultaneously display the output of two pressure sensors, two RTD's or one of each. It offers 12 standard user selectable engineering units and one custom value. Other dedicated front panel buttons make it easy to set zero, check max/min values, adjust measurement damping, select either or both ports for standard display, additive or differential display, print the display and configure the RS232 output. All front panel features are accessible via the RS232 port for remote configuration or data acquisition.



### PRODUCT SPECIFICATIONS

#### PHYSICAL SPECIFICATIONS

##### Dimensions

7.72 in. (L) x 6 in. (W) x 2.95 in. (H)

##### Panel Cutout

5.4 in. x 2.68 in.

##### Weight

Depending on configuration  
Max. <4 lbs. w/2 sensors and battery pack

##### Case Material

High impact ABS

##### Sensor Capacity

2 bays for Ashcroft PPT sensors

##### Display

2 line LCD, 0.38 in. height per line. Can display simultaneous readings from 2 modules.

##### Options

*Backlit Display*  
*Built-in NiCad Rechargeable Battery Pack*  
*Handle*  
*Panel Mounting Brackets*

#### OPERATING SPECIFICATIONS

##### Operating Temperature Range

32° to 120°F

##### Storage Temperature

-4° to 158°F

##### Update Rate

130 ms (nominal) with one sensor installed

##### Resolution

±0.002% of span, 60,000 counts (max)

##### Power Requirements

Standard: ac adapter provided for 110Vac/60 Hz  
Available: ac adapter provided for 220Vac/50 Hz  
ac adapter provided for 100Vac/60 Hz  
Optional: Built-in rechargeable NiCad Battery Pack\*

\* (Life: 25 hours nominal without backlit LCD, 5 hours nominal with backlit LCD. Activating RS232 results in approximately 30% reduction in battery life.)

##### Certification

N.I.S.T. Traceable certification document provided for base display unit and sensor modules

#### PRESSURE SENSOR SPECIFICATIONS

##### PPT-1

##### Pressure Types

Gauge, differential and compound

##### Available Ranges

(See Chart)

##### Available Accuracies

±0.06 (0/1-0/200 in. H<sub>2</sub>O), ±0.07 (0/0.25-0/0.5 in. H<sub>2</sub>O) or 0.1% of Span

##### Compensated Temperature Range

20°F to 120°F

##### Temperature Effect

±.004% of Span per °F over compensated range (from reference temperature range of 70° ±3°)

##### Repeatability

±0.01% of span (range 0/1 in. H<sub>2</sub>O or higher)  
±0.02% of span (ranges below 0/1 in. H<sub>2</sub>O)

##### Sensitivity

±0.002% of span (typical)

##### Media Compatibility

Clean, dry, non-conductive, non-corrosive gas

##### Under/Overpressure Capability

-15 to 50 psi

##### Maximum Static (line) Pressure

100 psi

##### Process Connection

Standard: 1/8 NPT female

##### PPT-2

##### Pressure Types

Gauge, absolute, compound and vacuum

##### Available Ranges

(See Chart)

##### Available Accuracies

±0.025, 0.05 or 0.1 % of Span (±0.025 & 0.05% not available on 0/10,000 psi range)

##### Compensated Temperature Range

20°F to 120°F

##### Temperature Effect

Standard: ±.004% of Span per °F over the compensated range (from reference temperature range of 70° ±3°)

Optional: No additional error due to temperature over the compensated range

##### Repeatability

±0.01% of span

##### Sensitivity

±0.002% of span (typical)

##### Media Compatibility

0/5-0/10,000 psi ranges: Any medium compatible with 316 SS isolation.

Optional: Cleaned for Oxygen Service

##### Overpressure Capability

200% for ranges up to 1000 psi  
150% for ranges over 1000 psi

##### Process Connection

Standard: 1/8 NPT female

Optional: 1/8 NPT female with flush port  
Welded VCR fitting with standard finish (for ranges up to and including 5000 psi)

Consult factory for guidance in product selection  
Phone (203) 378-8281 or visit our  
web site at [www.ashcroft.com](http://www.ashcroft.com)

## Pressure Tester Model PT, Dual Display LCD Digital Pressure Indicator

### RTD INTERFACE ASSEMBLY

PPT-RT1: Accommodates Pt100, Ni120, Cu120 and other common 2, 3 or 4 wire probes with resistance outputs of 400 ohms or less.  
PPT-RT2: Accommodates Pt1000 and other common 2, 3 or 4 wire probes with resistance outputs of 4000 ohms or less.

#### Input Receptacle

Accepts TA4F type RTD connector

#### RTD Probes Available

Pt-100 probes, 6" or 12" length, with or without handle. DIN Class A accuracy. Includes mating TA4F connector. Consult factory for details and availability.



Rear view of Model PT  
with 2 pressure sensors installed

### STANDARD RANGES

PPT-2 psi (gauge and absolute pressure)	PPT-1 in.H <sub>2</sub> O (gauge/ differential pressure)	Other Engineering Units**
5		
10	0.25*	psi
15	0.5*	in.H <sub>2</sub> O
30	1.0*	in.Hg
50	2.0*	ftSW
60	3.0*	bar
100	5.0*	mbar
150	10*	kPa
200	15*	MPa
250	25*	mmHg
300	50*	cmH <sub>2</sub> O
500	100*	mmH <sub>2</sub> O
600	150*	kg/cm <sup>2</sup>
1000	200*	User Selectable
1500		
2000		
2500		
3000		
5000		
6000		
7500		
10,000		
<b>vacuum</b>		
5		
10		
15		
<b>compound</b>		
±5		
±10	±0.125*	
±15	±0.25*	
-15/+30	±0.5*	
-15/+60	±1.0*	
	±1.5*	
	±2.5*	
	±5.0*	
	±7.5*	
	±12.5*	
	±25*	
	±50*	
	±75*	
	±100*	

\*\*Note: Engineering units identified above are accessible through the unit select feature. However, readout will default to the primary unit of measure on start-up. Sensor modules scaled in primary units other than in. H<sub>2</sub>O (PPT-1) or psi (PPT-2) are also available. Consult factory.

\* Non-isolated, for clean dry gas only

### TO ORDER

#### Base Display Unit

- 1) Specify Model: PT
- 2) Specify Power Requirements: 110, 220 or 100Vac
- 3) Specify Options: (Backlit, NiCad Battery Pack, Handle, Panel Mounting Brackets)

#### Sensors

(Base Display Unit can hold a total of 1 or 2 pressure sensors or RTD interface assemblies simultaneously. Sensors and interface assemblies will be installed into the base display unit at the factory.)

- 4) Type (PPT-1 or PPT-2)
- 5) Pressure Range and Unit of Measure (see range chart)
- 6) Pressure Type (see specifications)
- 7) Accuracy (see specifications)
- 8) Specify Options
  - a) "zero temperature error over compensated range" (PPT-2 only)
  - b) Optional fitting (see specifications)
  - c) Clean for Oxygen Service (PPT-2 only)

#### RTD Interface Assembly

- 9) Type (PPT-RT1 or PPT-RT2)
- 10) Probe Type (when required. Consult factory for probe P/N)

Consult factory for guidance in product selection  
Phone (203) 378-8281 or visit our  
web site at [www.ashcroft.com](http://www.ashcroft.com)

Ashcroft® precision-pressure volume controllers provide a quick-and-easy method for precisely setting a pressure in a closed pneumatic system. They are ideal for use with Ashcroft test gauges for the calibration of other pressure-measurement and control devices.

The AVC unit consists of a volume chamber with an internal piston assembly. The piston seals across the diameter of the chamber. Once the AVC unit is connected to a pneumatic system, the volume of the chamber becomes part of the volume of the system. The pressure-adjust knob at the front of the unit repositions the piston within the chamber through interaction with a precision-machined lead screw. Piston movement within the chamber increases or decreases the volume of the system, depending on the direction of movement. In a closed system where gas cannot leak out upon compression or be drawn in upon expansion, this volume change results in a change in the internal pressure. Increasing the volume by moving the piston toward the front of the AVC unit will decrease the pressure. Conversely, decreasing the volume by moving the piston toward the rear of the unit will increase the

pressure. The pressure change generated by a given amount of piston travel is proportional to the change in volume as compared to the total system volume.

AVC units are available for pressures up to 3000 psi. The AVC-1000 can be used to set pressures from vacuum through 1000 psi while the AVC-3000 can be used for pressures from vacuum through 3000 psi.

An integral balance valve provides a means for equalizing pressure on both sides of the piston prior to making the final adjustments when setting the pressure. This minimizes the resistance encountered when repositioning the piston and assures ease of pressure setting, even at 3000 psi. The balance valve also serves as a pressure-relief valve, assuring that the differential pressure across the piston does not reach unsafe levels.

AVC units can also be used without a compressed air source for the generation of moderate levels of positive pressure and vacuum. The high resolution of the AVC, combined with the ability to generate pressure and vacuum, make it an ideal tool for low-pressure (below 1 psi) calibration and test as well as higher pressure calibration and test activities.



#### GENERAL SPECIFICATIONS

Type	AVC-1000	AVC-3000
Range (psi)	vacuum-1000	vacuum-3000
Resolution (psi)	0.00025	0.0005
Volume Change (cubic inches)	3.5	2.5
Mechanical Rotation (turns)	31	61
Proof Pressure (psi)	3000	6000
Burst Pressure (psi)	6000 min	12,000 min
Operating Temperature Range	20-120°F	20-120°F
Operating Media	Clean, dry noncorrosive gas such as compressed air or nitrogen	
Construction	Aluminum body, stainless steel, brass Teflon, Delrin and Buna N	

*Consult factory for guidance in product selection  
Phone (203) 378-8281 or visit our  
web site at [www.ashcroft.com](http://www.ashcroft.com)*

